




A1 THRU A7 D1 THRU D7


1.0AMP CILICON RECTIFIERS
VOLTAGE RANGE 50 TO 1000 VOLTS

FEATURES

- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- High surge current capability
- Small size simple installation



SOD123FL

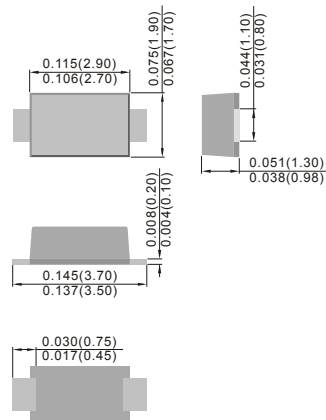

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Dimensions in inches and (millimeters)

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

TYPE NUMBER		D1	D2	D3	D4	D5	D6	D7	UNITS
		A1	A2	A3	A4	A5	A6	A7	
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @TA=75 °C	I(AV)	1.0							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	IFSM	30							A
Maximum Forward Voltage at 1.0A DC	VF	1.1							V
Maximum DC Reverse Current @TJ=25°C at Rated DC Blocking Voltage @TJ=100°C	IR	5 50							μA
Typical Junction Capacitance (Note1)	CJ	10							pF
Typical Thermal Resistance (Note2)	RθJA	30							°C/W
Operating Temperature Range	TJ	-55 to +125							°C
Storage Temperature Range	TSTG	-55 to +125							°C

NOTES:1.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

2.Thermal resistance junction of ambient.

A1 THRU A7 D1 THRU D7

RATING AND CHARACTERISTIC CURVES

