

***KBJ60X SERIES***



***GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER***

产

品

规

格

确

认

书

*<http://www.clt-hz.com>*

---

# KBJ6005 THRU KBJ610

## GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER



**REVERSE VOLTAGE:** 50 to 1000 VOLTS  
**FORWARD CURRENT:** 6.0 AMPERE

### FEATURES

- Glass passivated chip junction
- Reliable low cost construction utilizing molded plastic technique
- Ideal for printed circuit board
- Low forward voltage drop
- Low reverse leakage current
- High surge current capability

### MECHANICAL DATA

Case: Molded plastic, KBJ


Epoxy: UL 94V-O rate flame retardant

Terminals: Leads solderable per MIL-STD-202,  
method 208 guaranteed

Mounting position: Any

Weight: 0.16ounce, 4.6gram

### KBJ

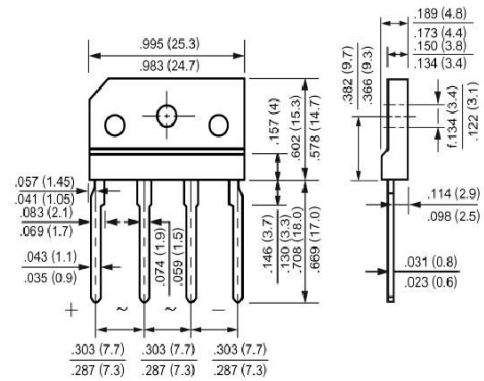

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	KBJ6005	KBJ601	KBJ602	KBJ604	KBJ606	KBJ608	KBJ610	Units
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at T <sub>C</sub> =110°C	I <sub>(AV)</sub>	6.0							Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	150							Amp
Maximum Forward Voltage at 3.0A DC and 25°C	V <sub>F</sub>	1.0							Volts
Maximum Reverse Current at T <sub>A</sub> =25°C at Rated DC Blocking Voltage T <sub>A</sub> =125°C	I <sub>R</sub>	5.0 500							uAmp
Typical Junction Capacitance (Note 1)	C <sub>J</sub>	80							pF
Typical Thermal Resistance (Note 2)	R <sub>θJC</sub>	1.5							°C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150							°C

### NOTES:

1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.

2- Thermal Resistance from Junction to Case with Device Mounted on 75mm x 75mm x 1.6mmCu Plate Heatsink.

# KBJ6005 THRU KBJ610

## GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER



### RATINGS AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER BRIDGE ELEMENT

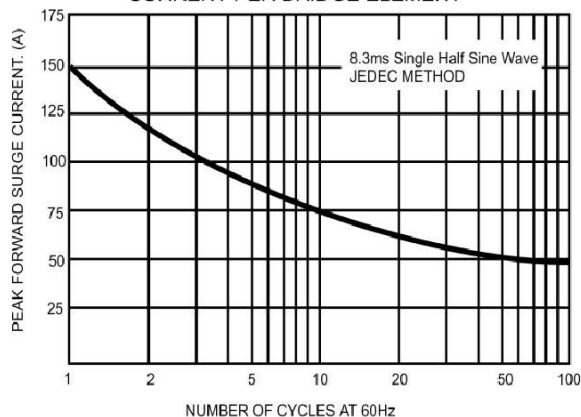


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

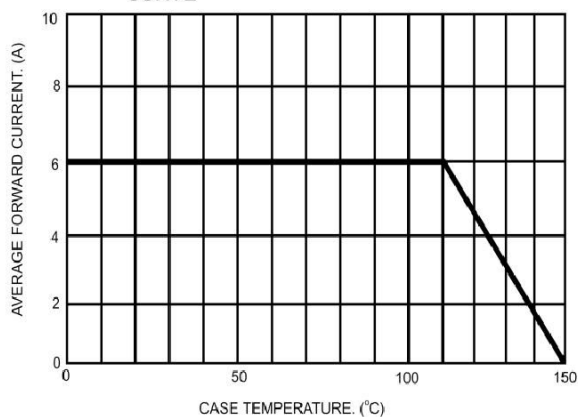


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

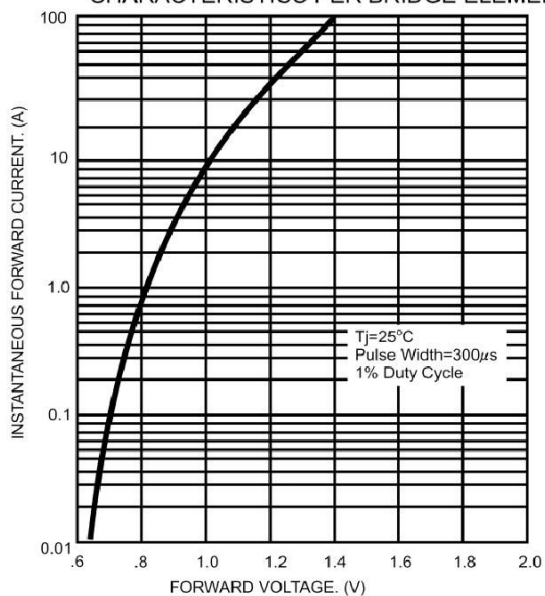


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

